

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
27 October 2005 (27.10.2005)


PCT

(10) International Publication Number
WO 2005/100706 A1

- (51) International Patent Classification⁷: E03F 5/08, (74) Agents: POWIS DE TENBOSSCHE ROLAND et al.;
B01D 50/00, 53/04 Cabinet Bede S.A., Boulevard General Wahis 15, B-1030
Bruxelles (BE).
- (21) International Application Number: PCT/BE2005/000047 (81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA,
MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM,
PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY,
TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU,
ZA, ZM, ZW.
- (22) International Filing Date: 6 April 2005 (06.04.2005)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 0408298.8 14 April 2004 (14.04.2004) GB
- (71) Applicant (for all designated States except US): STUDOR
S.A. [LU/LU]; 38, Boulevard Napoléon 1er, L-2210 Lux-
embourg (LU).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): ERICSON, Kurt,
Sture, Birger [SE/BE]; Prins Boudewijnlaan, 48, B-2970
Schilde (BE).
- (84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: AIR VENTING SYSTEM

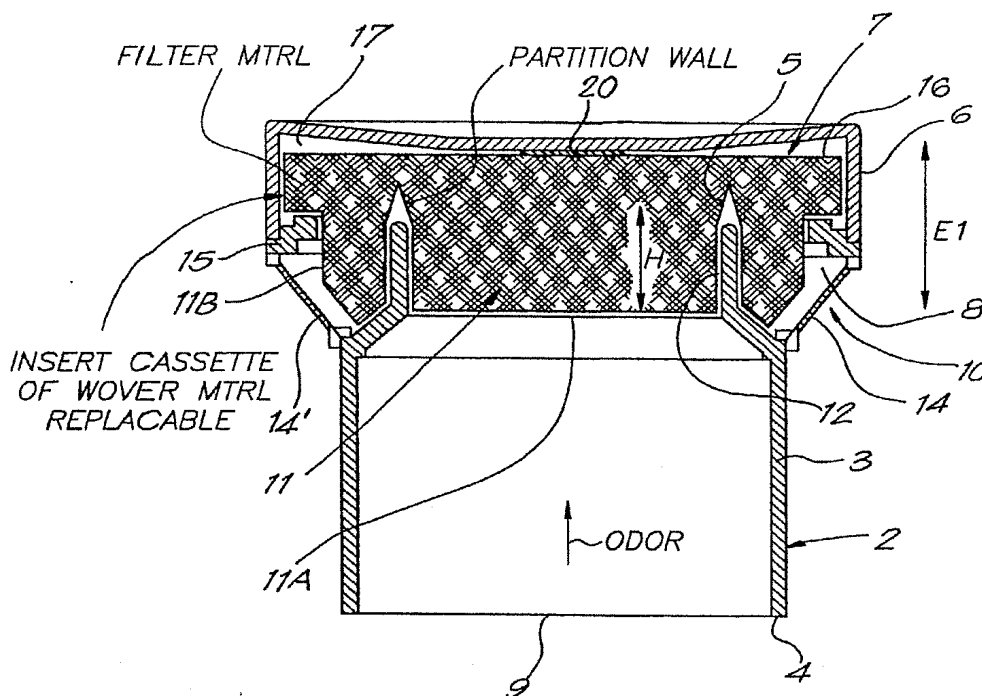

(57) Abstract: Air venting system comprising: a body defining an inner chamber; and an odor absorbing means placed in the inner chamber, said odor absorbing means having an inlet surface and an exhaust surface, whereby the system is adapted for defining a gas flowing path between the inlet surface and the exhaust surface of the odor absorbing means, said flowing path in the odor absorbing means having at least two opposite flow path portions.

WO 2005/100706 A1



Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.